

# 4.00mm SHANK

6 FLUTE MICRO REAMERS


2.41mm - 2.72mm DIAMETER

Mirror Surface Finishes

Sub Micron Grain Carbide

Left Hand Spiral, Right Hand Cutting

For Reaming Through Holes

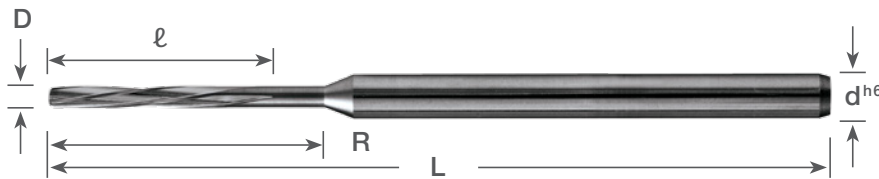

Symbol Descriptions [Page 7](#)

## STANDARD Length (Metric Sizes)

Dimensions (mm)					Uncoated	
D <sup>+0.003mm</sup> <sub>-0.000mm</sub>	d <sup>h6</sup>	ℓ	L	R	Part Number	Stock
2.41	4	14	75	51	MR46-0949.563	●
2.42	4	14	75	51	MR46-0953.563	●
2.43	4	14	75	51	MR46-0957.563	●
2.44	4	14	75	51	MR46-0960.563	●
2.45	4	14	75	51	MR46-0965.563	●
2.46	4	14	75	51	MR46-0968.563	●
2.47	4	14	75	51	MR46-0972.563	●
2.48	4	14	75	51	MR46-0976.563	●
2.49	4	14	75	51	MR46-0980.563	●
2.50	4	14	75	51	MR46-0984.563	●
2.51	4	14	75	51	MR46-0988.563	●
2.52	4	14	75	51	MR46-0992.563	●
2.53	4	14	75	51	MR46-0996.563	●
2.54	4	14	75	51	MR46-1000.563	●
2.55	4	14	75	51	MR46-1004.563	●
2.56	4	14	75	51	MR46-1008.563	●
2.57	4	14	75	51	MR46-1012.563	●
2.58	4	14	75	51	MR46-1015.563	●
2.59	4	14	75	51	MR46-1019.563	●
2.60	4	14	75	51	MR46-1024.563	●
2.61	4	14	75	51	MR46-1028.563	●
2.62	4	14	75	51	MR46-1031.563	●
2.63	4	14	75	51	MR46-1035.563	●
2.64	4	14	75	51	MR46-1039.563	●
2.65	4	14	75	51	MR46-1043.563	●
2.66	4	14	75	51	MR46-1047.563	●
2.67	4	14	75	51	MR46-1051.563	●
2.68	4	14	75	51	MR46-1055.563	●
2.69	4	14	75	51	MR46-1059.563	●
2.70	4	14	75	51	MR46-1063.563	●
2.71	4	14	75	51	MR46-1067.563	●
2.72	4	14	75	51	MR46-1071.563	●

### SERIES MR46 WORKPIECE MATERIAL

Coating	P	P	H	H	M	K	N	N	N	N	N	N	N	S	S
	Steel ~30HRC	Steel 30-40HRC	Hardened Steel ~55HRC	Hardened Steel ~68HRC	Stainless Steel	Cast Iron	Aluminum	Graphite	Copper Alloy	CFRP	Plastic	Thermoset Plastic	High Density Plastic	Nickel / Cobalt	Titanium Alloy
Uncoated	★	★	★	★	★	☆	☆	☆	☆	☆	☆	☆	☆	★	★

★ : Priority ☆ : Applicable Materials

Symbol Descriptions [Page 7](#)